


DR-S

The outer races are made of polyacetal resin and the inner races and balls are made of stainless steel.

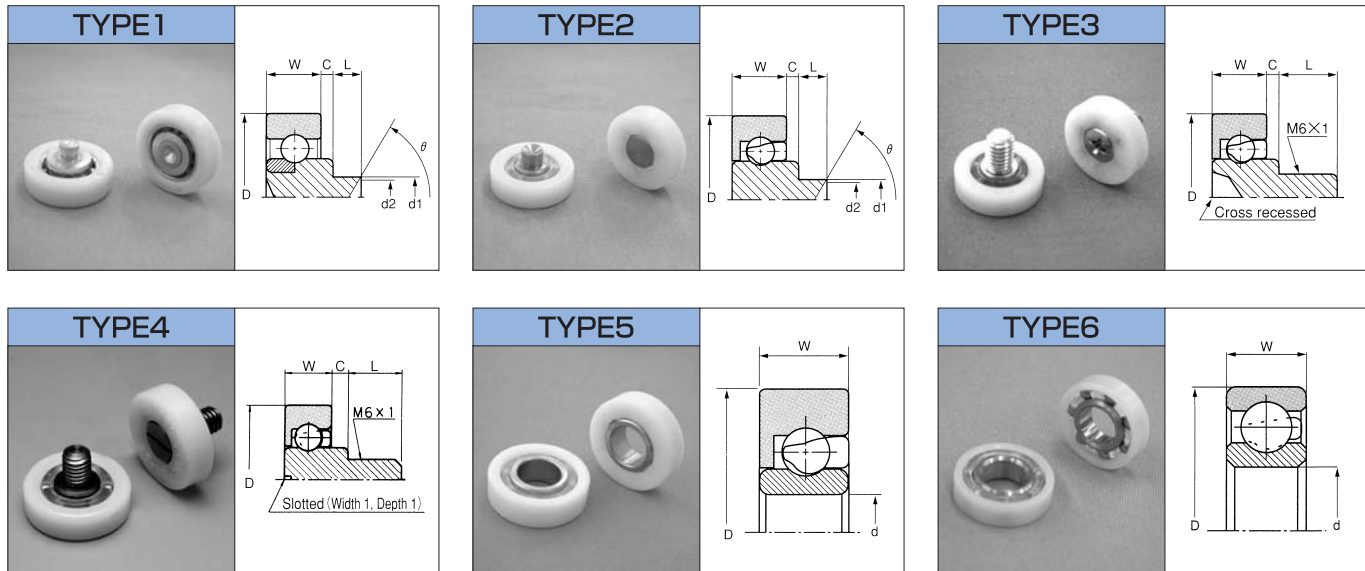

Code	Part No.	D _{-0.1} [mm]	d ^{+0.1} ₀ [mm]	d1 _{-0.1} [mm]	W _{-0.2} [mm]	C ^{±0.4} [mm]	L ^{±0.2} [mm]	(d2 × θ) ^{*1}	Load ^{*2} [N] (kgf)	Type	Q'ty [pcs/box]	Gross Weight [kg/box]
000002	DRS-16-SAS1-GN	16 _{-0.3}	—	4	5 ^{±0.2}	1	3.5	φ3 × 100°	—	1	2,000	9.0
000202	DR-19-SAS0.5-GN	19	—	5	6	0.5	3.5 _{-0.2}	φ4 × 120°	—	2	2,000	10.7
000421	DR-22-SAS1	22	—	5	7	1 ^{±0.3}	3.4 ^{±0.1}	φ4 × 90°	—	2	1,000	9.0
020202	DR-19-SBS0.5	19	—	—	6	0.5	8 ^{±0.5}	—	—	3	2,000	12.5
020442	DR-22-SBS0.5-GN	22	—	—	7	0.5	8 ^{±0.5}	—	—	4	1,000	9.8
020735	DR-26-SBS0.5	26	—	—	7	0.5	8 ^{±0.5}	—	—	4	1,000	10.1
021001	DR-30-SBS0.5	30	—	—	7	0.5 ^{±0.3}	8 ^{±0.5}	—	—	4	500	6.8
021100	DR-35-SBS0.5	35	—	—	7	0.5 ^{±0.3}	8 ^{±0.5}	—	—	4	300	4.0
040101	DR-18-SHS6-GN	18	6	—	6	—	—	—	—	5	2,500	7.8
040207	DR-19-SHS6	19	6	—	6	—	—	—	—	5	2,500	8.1
040404	DR-22-SHS6-GN	22	6	—	7	—	—	—	—	5	1,000	7.0
040414	DR-22-SHS8-GN	22	8	—	7	—	—	—	—	5	1,000	5.3
040801	DR-28-SHS6-GN	28	6	—	7	—	—	—	—	5	500	4.2
041601	DR-26-SHS10-GN	26	10	—	8	—	—	—	98 (10)	5	1,000	7.9
041611	DR-30-SHS10-GN	30	10	—	9	—	—	—	147 (15)	5	500	7.7
041613	DR-32-SHS12-GN	32	12	—	10	—	—	—	176 (18)	5	500	9.6
041615	DR-35-SHS15-GN	35	15	—	11	—	—	—	176 (18)	5	400	10.6
041617	DR-40-SHS17-GN	40	17	—	12	—	—	—	205 (21)	5	250	6.9
041619	DR-47-SHS20-GN	47	20	—	14	—	—	—	235 (24)	5	150	8.7
040103	DR-18-SHS8	18	8	—	5	—	—	—	—	6	3,000	8.7

*1 Reference Dimension

*2 Allowable Load at 300min⁻¹ (300r.p.m.)

Size limits can be modified for practical applications. Please contact our sales/engineering departments for further information and assistance. These products are made to order.

TOK BEARING CO.,LTD.

HEAD OFFICE, TOKYO, JAPAN – TEL : 81-3-3969-1534 FAX : 81-3-3969-9354
EMAIL : overseas@tok-bearing.co.jp

Product specification are subject to change without prior notice.

Before assembly or use of any bearing, please read "Caution for Use"